

Engineered with Precision

 LX Hausys

hflor.eu

H·FLOR

Product Catalogue

 Luxury Vinyl Tile Flooring

WHAT MAKES HFLOR'S LVT SO UNIQUE?

DURABLE TECHNOLOGY

Our double coated surface treatment improves resistance to scratches and stains whilst also ensuring the floor is easy to clean and maintain. Our products also offer excellent resistance to indentation, which protects against damage.

All of our LVT is protected by a warranty of at least 20 years for residential installations or 10 years for commercial installations.



HUMAN FRIENDLY

Our strategy concentrates on developing and engineering human-inspired and trend-focused products that add to quality of life. Our LVT collections are warmer and quieter underfoot when compared to their natural wood and stone counterparts and are suitable for underfloor heating. Our LVT creates an aesthetically pleasing, contemporary yet timeless environment that is both comfortable and future proof.



EXCELLENT RESISTANCE TO WATER

Compared with wood or laminate flooring, LVT is completely water resistant with no swelling or distortion making it the perfect choice for all areas.

With its anti-bacterial properties, LVT is the ideal floor for kitchens, bathrooms and playrooms where spills can be easily wiped away.



DESIGN INNOVATION

A beautiful assortment of unique wood and stone finishes available across a natural and modern colour palette. High resolution imaging presents a realistic visual combined with a textured surface for the ultimate real feel.



CONSIDERATE SPACES

Our LVT ranges are hygienic and easy to maintain. Unlike carpet and other flooring types they don't hold dust, dirt, pollen or other allergens. The double coated surface treatment protects your floor by minimising dirt adhesion, making regular cleaning easier and reducing the need for specialist products and equipment. To care for your floor simply brush, vacuum or damp mop the area.



ECO-CONSCIOUS

Our brand values stem from developing products using ethical and eco-conscious manufacturing techniques to give you products that not only look great but also provide comfortable and safe environments.

Our entire LVT collection is both FloorScore® and DIBt certified for superior indoor air quality whilst also being free from harmful plasticisers and heavy metals. Instead it is made from safer, stronger raw materials and is fully recyclable.



PRESTG DECORIGID

PRESTG DECORIGID 55

PATTERNS AND COLOURS

STONE




Crack Concrete Black 6904



Pearl Concrete 6913



Marble Bianco 6917



Concrete Silver 6942



Concrete Light Grey 6944



Crack Concrete Grey 6906



Marble Onyx 6915



Concrete Taupe 6941



Concrete Anthracite 6943

WOOD



Birch Marigold 7806



Birch Buttermilk 7831



Washed Oak Camel 7837



Treasure Oak Umber 7911



Washed Oak Grey 7915



Birch Honey Gold 7830



Washed Oak Sand 7836



Weathered Pine 7910



Treasure Oak Autumn 7913



Washed Oak Sunflower 7916



	Wear Layer	Pattern	Total Thickness	Dimensions Width x Length	Packaging per carton
PRESTG DECORIGID 55	0.55 mm	STONE	6.0 mm	450 mm x 900 mm	2.43 sqm (6 pcs)
		WOOD	6.0 mm	228.6 mm x 1220 mm	2.23 sqm (8 pcs)



450 mm x 900 mm

Crack Concrete Black 6904




450 mm x 900 mm

Crack Concrete Grey 6906




450 mm x 900 mm

Pearl Concrete 6913

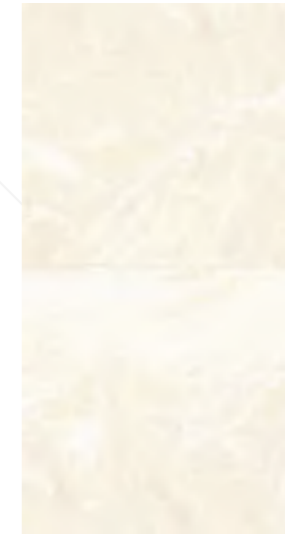

450 mm x 900 mm

Marble Onyx 6915

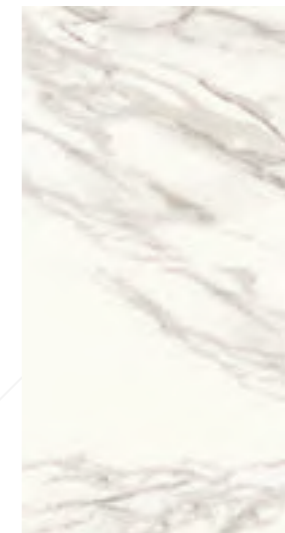

450 mm x 900 mm

Marble Bianco 6917



450 mm x 900 mm

Concrete Taupe 6941




450 mm x 900 mm

Concrete Silver 6942



450 mm x 900 mm

Concrete Anthracite 6943

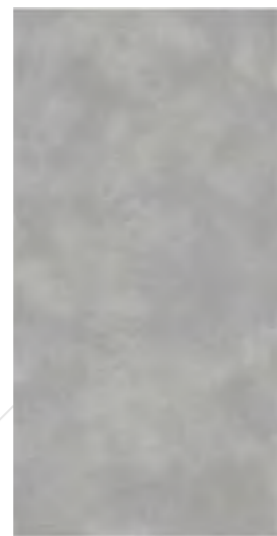

450 mm x 900 mm

Concrete Light Grey 6944





Birch Marigold 7806

228.6 mm x 1220 mm



Birch Honey Gold 7830

228.6 mm x 1220 mm



Birch Buttermilk 7831

228.6 mm x 1220 mm



Washed Oak Sand 7836

228.6 mm x 1220 mm



Washed Oak Camel 7837

228.6 mm x 1220 mm



Weathered Pine 7910

228.6 mm x 1220 mm



Treasure Oak Umber 7911

228.6 mm x 1220 mm



Treasure Oak Autumn 7913

228.6 mm x 1220 mm



Washed Oak Grey 7915

228.6 mm x 1220 mm



Washed Oak Sunflower 7916

228.6 mm x 1220 mm



TECHNICAL DATA SHEET

PRESTG DECORIGID meets the requirements of EN ISO 10582

Characteristic	Standard	Unit	PRESTG DECORIGID
Type of Flooring	EN ISO 10582		PVC Heterogeneous
Classification	EN ISO 10874		Class 23/33/42
Weight	EN ISO 23997	kg/sqm	8.25
Overall Thickness	EN ISO 24346	mm	6.0
Wear Layer Thickness	EN ISO 24340	mm	0.55
Dimensional Stability	EN ISO 23999	%	< 0.10 average result 0.05
Wear Resistance	EN 660-2		T
Castor Chair Resistance	EN ISO 4918		No Change
Burning Characteristic	EN 13501-1		Blf-s1
Stain Resistance	EN ISO 26987		No Change PUR Surface Treatment
Slip Restraint	EN ISO 51130		R10
Acoustic Insulation	EN ISO 717-2	dB	22
Warranty In Years	EN 12524		10 Commercial 25 Residential

